



TOKO VALEX

ELECTRIC CONTROL VALVE

The electric actuator is made by MG Co., Ltd.



No time- and money-consuming air source equipment is required!



- Energy saving
- Space saving
- Shorter installation work time

Furthermore,

many more advantages!

Directly connected to various open networks to save wiring efforts to a great extent!



Open Network Supported

See **Guidance 2** on page 8.

CC-Link

DeviceNet

LONWORKS^(*)Modbus^(*)HART^(*)
COMMUNICATION PROTOCOLFOUNDATION^(*)PROFIBUS^(*)

(*) Contact us for details.

Electric control valve is ready to operate immediately after connecting signal and power supply!



High function and high performance

- High thrust (5000 N)
- High resolution (1/1000)
- A battery-driven model is available as well.




The electric control valve fully demonstrates its functions

PNEUMATIC

The pneumatic control valve requires complicated equipment and consumes plenty of power.

A compressor entails equipment costs as well as troublesome maintenance work! What is more, it results in high electricity bills!

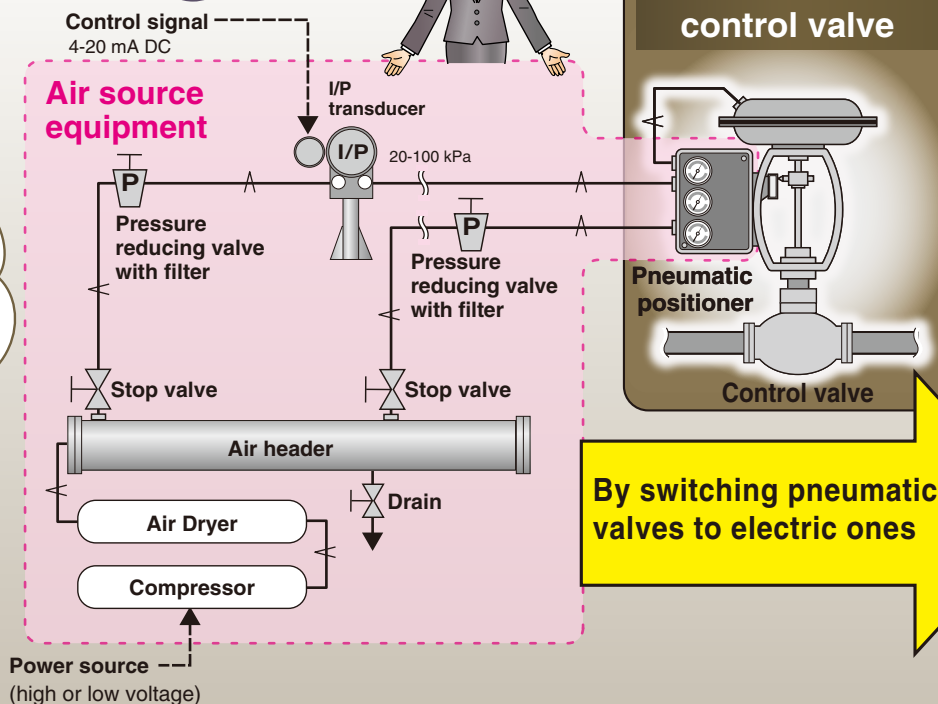

By switching pneumatic valves to electric ones

The electric control valve connects to various open networks directly.

A number of electric control valves with open network capability connect in a daisy-chain layout, which saves wiring effort. Various operating information on electric control valves can be collected through a single network.



CC-Link

DeviceNet

Modbus^(*)

LONWORKS^(*)

HART^(*)
COMMUNICATION PROTOCOL

FOUNDATION^(*)

PROFIBUS^(*)

For open networks, refer to **Guidance 2** on page 8.


^(*) Contact us for details

Electric control valve → PLC

- Opening position feedback
- Opening position input error
- Motor lock alarm
- Maintenance information (Motor activation count and integrated operation distance)
- Others

PLC → Electric control valve

- Opening position setting
- Forced opening and closing
- Alarm reset
- Maintenance information and reset
- Others

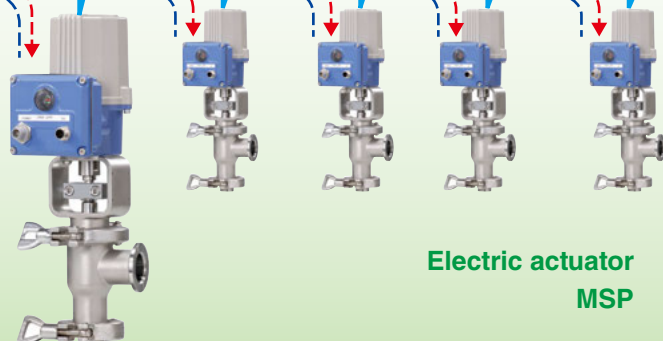

by simply connecting signal and power supply!

ELECTRIC

Equipment
cost ↓1/5 ^{(*)3}
Energy consumption
↓1/10 ^{(*)3}!

Only standby power ^{(*)4}
is consumed when the
control loop is in
a steady state.



Instrument air system and
ancillary equipment can be
eliminated

The electric control
valve does not require
incidental equipment, and
consumes less power.




Control signal 4-20 mA DC or open network

No air source equipment

Power source

Electric control valve



Control valve

^{(*)3} The data surveyed by
MG Co., Ltd.
^{(*)4} Maximum power
consumption: 240 VA
Standby power: 20 VA
The data is provided on the condition that
PSN1 Electric Actuator is used.


The stepping motor is adopted for the drive block.

Digital control unit

Features


- Instant zero/span position setup
- Flexible opening/closing speed settings
- Opening position output
- Lock alarm output

Stepping motor



High thrust 5000 N
High resolution 1/1000

Refer to **Guidance 1** on page 8.

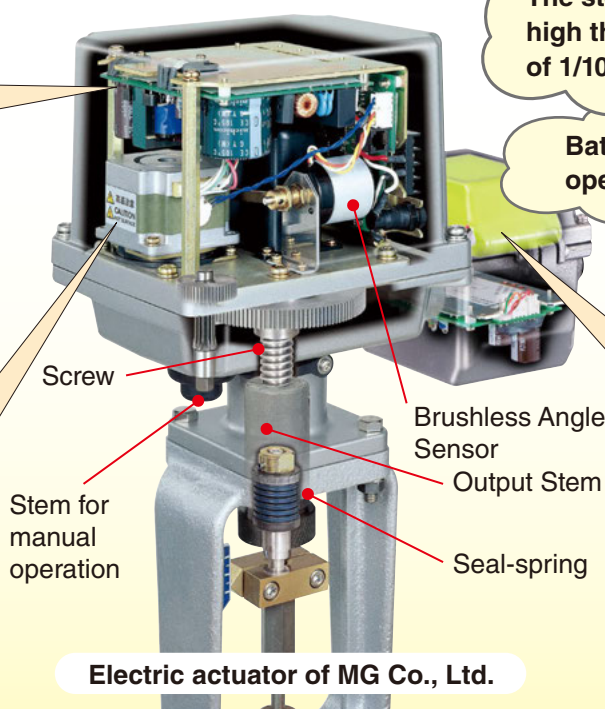


Electric actuator of MG Co., Ltd.

The stepping motor has
high thrust and a resolution
of 1/1000.

Battery for fail-safe
operation is optional.



Power outage emergency battery



Customers can choose models
provided with a battery as well
as functions of emergency
actions (i.e., Full Closed, Full
Open, Hold Position or Target
Value) in times of loss of power.


The photo shows PSN1 Electric Actuator.

The electric control valve is of a simple structure and compact, and it ensures high performance.



The electric actuator section is small, which makes it possible to narrow the distance between pipes.

The electric control valve has a very simple structure compared to the pneumatic control valve.

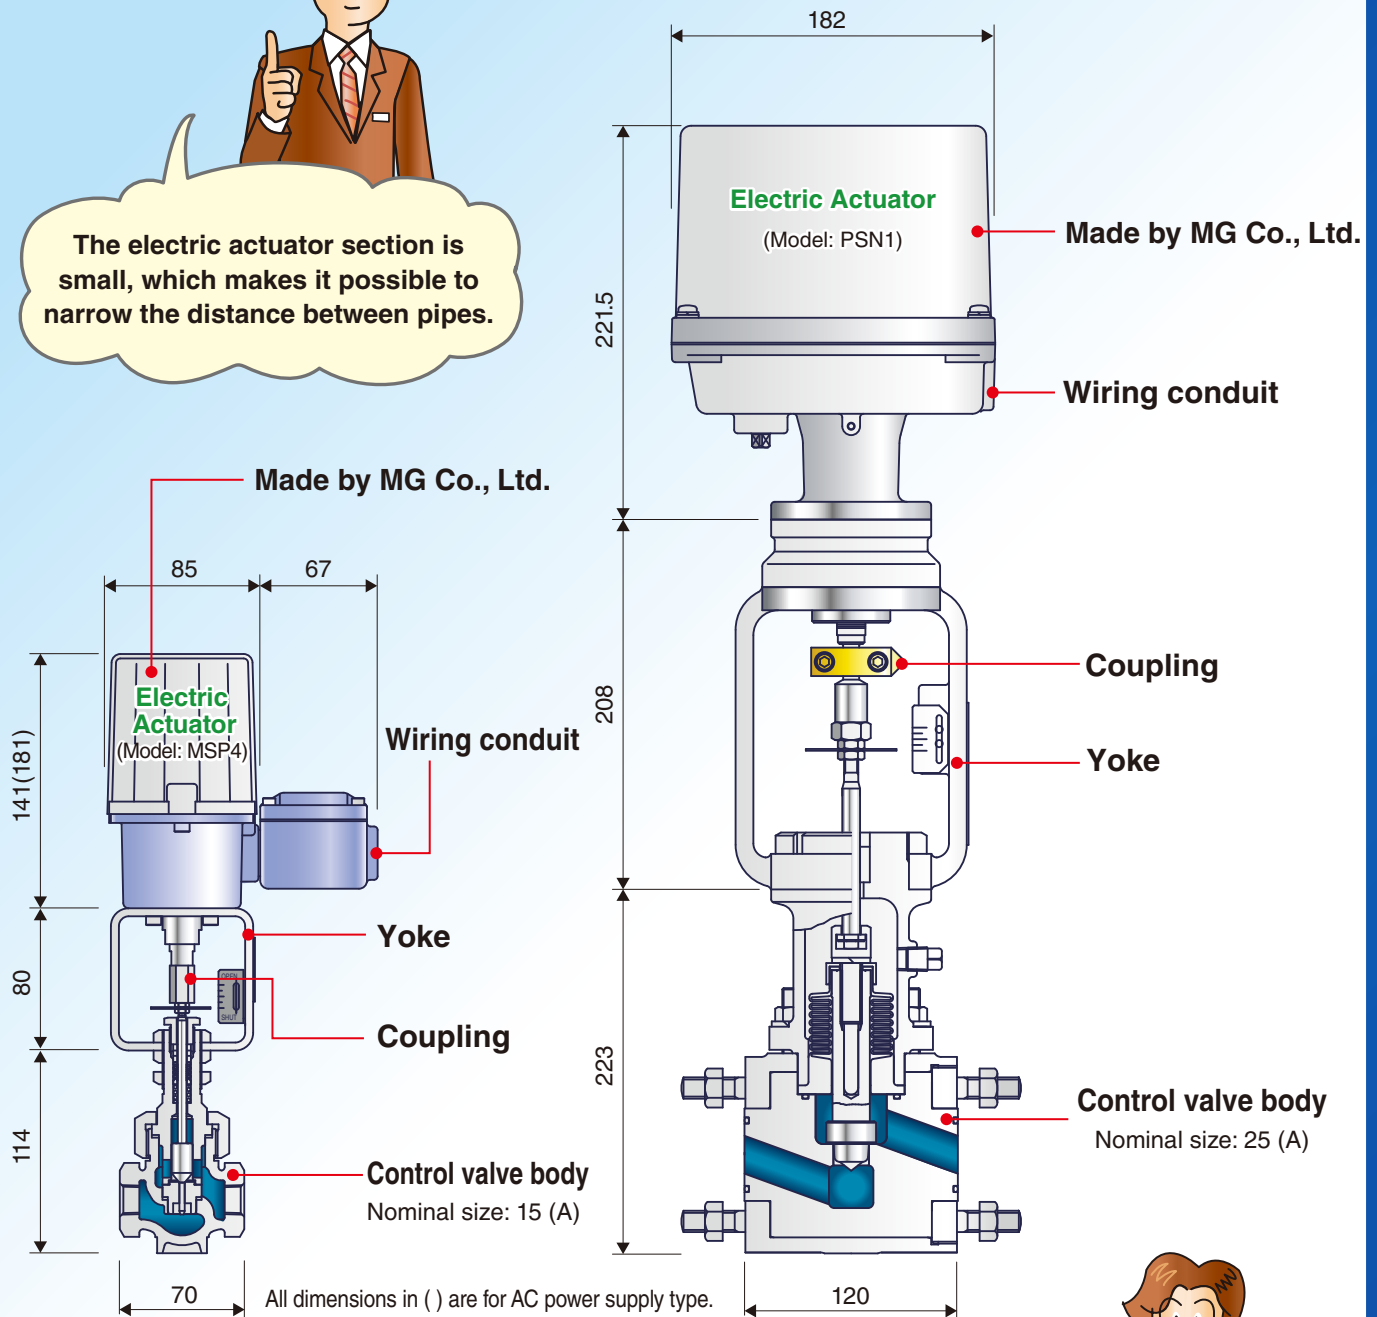

After installation, the electric control valve will be operational by just providing power supply and connecting signal input (or connecting a network).




Disposal Plants, Crushing Treatment Facilities, and Clean Centers

Applications

Combustion control / Boiler feedwater control /
Combustion exhaust gas control

Reasons for adoption

Space saving / Improved maintainability with no
need of air supply equipment / High functions
(valve position and other status output signals)



Universities and Research Facilities

Applications

Research, experiment and practice teaching facilities / Micro flow control


Reasons for adoption

Space saving / Low noise /
Improved controllability with high resolution

Free from
compressor
noises!

The quiet operation
is the reason for
adoption.

Quiet



Beverage and Medical Facilities

Applications

Sterile cleaning equipment / Carbon dioxide gas injection equipment

Reasons for adoption

Space saving /
Improved maintainability with no need of air supply equipment /
High functions / No air leak

We adopted the electric
control valve because it
keeps the environment
clean.



Car Manufacturers

Applications

Environment test equipment / Wind tunnel
experiment equipment / Exhaust gas
combustion experiment equipment / Others

Reasons for adoption

Improved maintainability with no need of air supply equipment



Water Purification Plant and Water Treatment

Applications

Chemical injection equipment

Reasons for adoption

Improved maintainability with no need of air supply equipment /
Improved controllability with high resolution



One of the reasons for adoption is the restoration
of the electric control valve as soon as power is
recovered in times of earthquake disasters.



Product Material, Building Material, Rubber, and Glass

Applications

Temperature control of molding equipment /
Utility equipment / Others

Reasons for adoption

Improved maintainability with no need of air supply equipment /
Improved controllability with high functions and high resolution



A high resolution 1/1000 of the
full-scale range was the deciding
factor for adoption.

1 / 1000


Power plant

Applications

Oxygen supply facility / Others

Reasons for adoption

Energy saving / Improved maintainability with no need of air supply equipment /
Improved controllability with high functions and high resolution




Pulp and Paper

Applications

Paper machine / Bleaching chemical injection equipment

Reasons for adoption


Energy saving / Improved maintainability
with no need of air supply equipment



Toko Valex's Electric Control Valves Main Pro

Two-way control valve for acid and alkali service (Resin made)

The T-8210 type control valve has excellent corrosion resistance to acid and alkali fluid because the wetted part is made of resin. The valves provides high seal performance with a gland packingless structure equipped with a PTFE bellows.

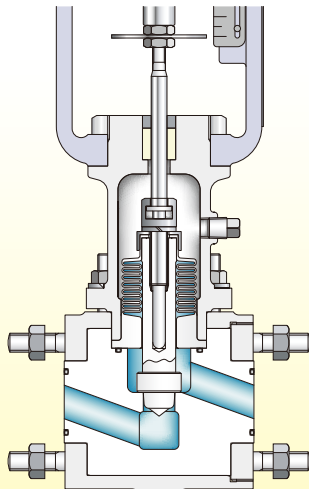

Nominal size (A): 15 to 65

OPTION

Wide
100

1
PTFE

S Material


For the meaning of the above optional icons, refer to **Guidance 3** on page 8.

T-8210

Globe type single seated control valve for water, steam, and gas service

The T-8110 type control valve is a control valve with a wide range of application, from water and steam to gas, etc.

• A cooling-type bonnet can be selected.

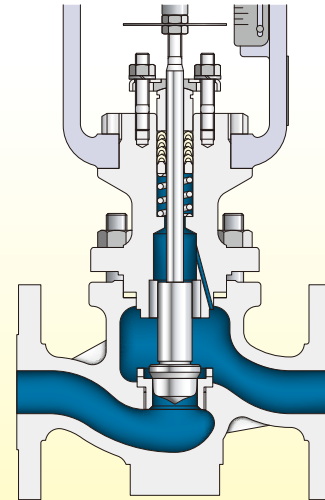

Nominal size (A): 15 to 300

OPTION

Wide
100

S Material

Special
End
Connect

H


For the meaning of the above optional icons, refer to **Guidance 3** on page 8.

T-8110

Low flow control valve for water, steam, and gas service

The T-8020 type control valve is a control valve suitable for very small flow control.

The valve is screwed connection type, small and lightweight.

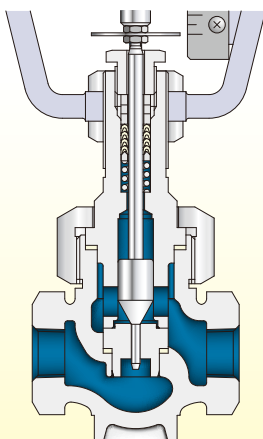

Compact control valve with a face-to-face dimension of 70 mm

Nominal size (A): 8 to 15

OPTION

Wide
100

S Material

Special
End
Connect


H

For the meaning of the above optional icons, refer to **Guidance 3** on page 8.

T-8020

Single seated bellows control valve with metal bellows for toxic fluid and vacuum service

The T-8115 type control valve has a structure equipped with an external pressure type bellows. The seal performance is superior to that of a general gland structure. Therefore, the control valve is applicable to controlling toxic fluid and vacuum service.

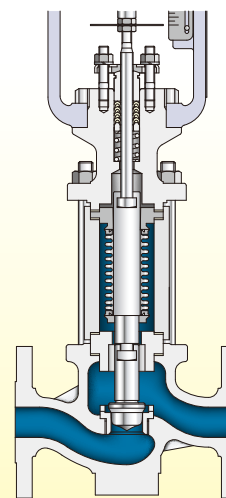

Nominal size (A): 15 to 300

OPTION

Wide
100

1.5
SUS316

3
SUS316

10.5
SUS316

S Material

Special
End
Connect


H

For the meaning of the above optional icons, refer to **Guidance 3** on page 8.

T-8115

Three-way control valve for mixing and dividing

There are two kinds of three-way control valves. One is a mixing three-way valve which mixes two kinds of fluid into one. The other is a flow dividing three-way valve which divides fluid into two directions.

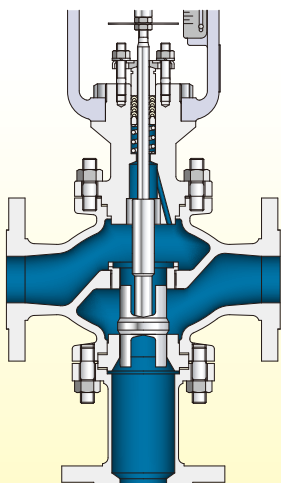

OPTION




For the meaning of the above optional icons, refer to **Guidance 3** on page 8.

Nominal size (A): 15 to 250

V-5310 V-5320

Cage-type control valve for high-pressure, high-differential pressure, and low-noise service (Double seated cage trim)

A cage-type control valve is a pressure balance control valve which is applicable to controlling high pressure or high differential pressure fluid by balancing the pressure in the cage. Trims can be combined according to uses. Applicable to a wide range of temperature from -196°C to 500°C.

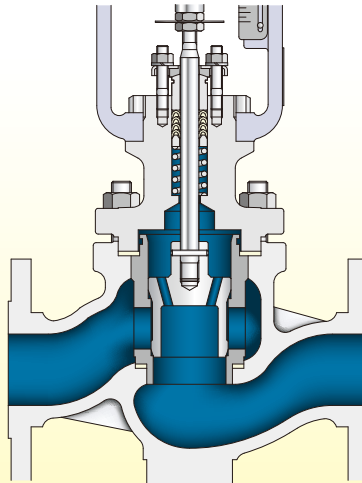

OPTION




For the meaning of the above optional icons, refer to **Guidance 3** on page 8.

Nominal size (A): 40 to 400

T-8132

Sanitary control valve for food and beverage service

The T-8910 sanitary control valve is a regulating valve for the sanitary process of products, such as food, drinks, and chemicals. It minimizes internal residual liquid, features a clamp-type split structure, and allows ease of disassembly cleaning, thus excelling in terms of sanitary and maintainability.

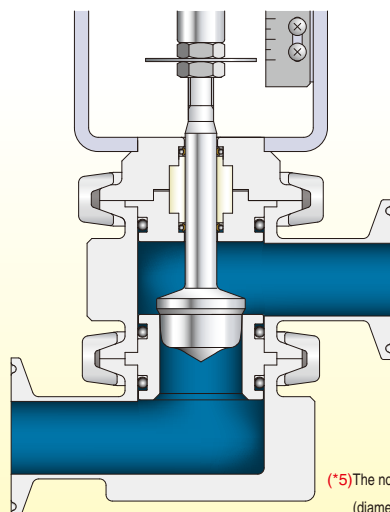


Nominal size (S) ^(*): 1/2 to 4 of the sanitary control valve.

T-8910

Angle-type cryogenic control valve (Vacuum container mounting)

The T-8800 type control valve controls cryogenic fluid, such as liquid helium whose service temperature is close to the absolute zero degree. The valve is installed by welding in a vacuum container. The valve trim has a structure which prevents galling thermal oscillation at low-temperature operation and provides good shutoff performance even if the pipe is deformed to some degree due to thermal change.



OPTION



For the meaning of the above optional icons, refer to **Guidance 3** on page 8.

Nominal size (A): 6 to 150


T-8800

Guidance 1 Stepping Motor

A stepping motor rotates by a constant angle per pulse.

A stepping motor, also called a pulse motor, is a motor that rotates in synchronization with a command pulse signal. The principle of rotation of a simplified 2-phase, 8-pole stepping motor model is shown in the figure below.

A stepping motor consists of a stator with windings and a rotor using a powerful neodymium magnet. Energizing the stator windings to generate a magnetic force is called excitation. By sequentially exciting the multiple stator windings based on the command pulse, the motor rotates stepwise, utilizing the action of attraction and repulsion between the magnetic poles of the stator and rotor. The rotation angle of a stepping motor is always determined by the constant mechanical accuracy (motor structure and machining accuracy) for each command pulse signal. Therefore, a stepping motor performs highly accurate positioning control.

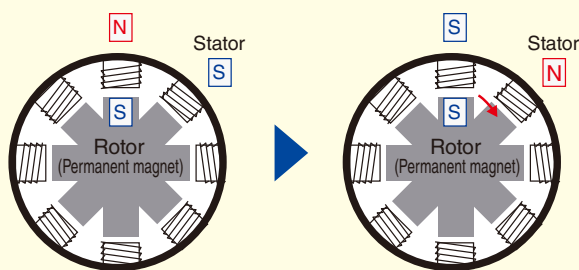

Guidance 2 Open Network

An open network is an industrial network, the specifications of which are made public and can be commonly used by many users and manufacturers.

Open networks are roughly divided into the following two types.

1. Those specified by organizations and associations in consultation and recognized as official standards.
 2. Those developed by specific manufacturers and organizations and established as de facto standards as a result of promotion activities.
- Both types have well-organized and integrated specifications and are available to everyone for many purposes. Either one can connect different manufacturers' devices (multivendor devices) and brings many benefits to users. Currently, many types of open networks are expanding their tempo of popularization according to the applicable field and country in the market.



DeviceNet

LONWORKS

Modbus

HART
COMMUNICATION PROTOCOL



Guidance 3 Explanation of Optional Icons

<p>Some types of inner valves that have an equal percentage flow characteristic can be replaced with optional inner valves with a flow rate rangeability of 100 to 1. Contact us for applicable valve specifications, applicable valve sizes, and other details.</p>	<p>Users can choose bellows with a withstanding pressure of 1 MPa G made of polytetrafluoroethylene (PTFE).</p>
<p>Valves with customized piping connection shapes and dimensions are available. Contact us with your desired pipe shape and dimensions in detail.</p>	<p>Users can choose bellows with a withstanding pressure of 1.5 MPa G made of stainless steel (grade 316).</p>
<p>Users can choose non-standard materials for wetted parts. Contact us with the materials of your choice.</p>	<p>Users can choose bellows with a withstanding pressure of 3 MPa G made of stainless steel (grade 316).</p>
<p>It is possible to manufacture products approved by the Minister of Economy, Trade and Industry of Japan in the certified range pursuant to the High Pressure Gas Safety Act (Japan). Contact us for the conditions and requirements of the fluid that needs to be controlled.</p>	<p>Users can choose bellows with a withstanding pressure of 10.5 MPa G made of stainless steel (grade 316).</p>

Notes on Catalog

- In order to satisfy the demands of users and make improvements in product quality, any part of the product specifications and appearances may be subject to change without notice.
- Do not post, divert, or copy the catalog without permission.
- Pictures and images may be different from actual products.
- Specifications and other items described in this catalog are limited to main parts.
- In order to use products correctly, be sure to read the instruction manuals carefully before use.
- Do not use products for purposes other than intended end-usage.
- The scope of usage is specified for each product described in this catalog according to official standards and specifications as well as in-house standards. Be sure to use proper products suitable to the application.
- The telephone number, address, and other contact information described in this catalog may be subject to change without notice.
- The contents of this catalog are valid as of January 2024.

Contact

TOKO VALEX CO., LTD. www.toko-valex.co.jp/EN_index.html

Shanghai Representative Office Room 101, Bldg. 1, No. 4277, Yindu Road, Minhang District, Shanghai, China
Tel: +86-21-3203-5651

Tokyo sales department 4-2-17, Matsushima, Edogawa-ku, Tokyo 132-0031
Tel: +81-3-3655-3171 Fax: +81-3-3655-5166

Actuator Manufacturer

MG Co., Ltd.
Headquarters 13th floor, Tradepia Yodoyabashi, 2-5-8 Imabashi, Chuo-ku,
Osaka 541-0042 JAPAN
International Sales Department Tel: +81-(0)6-7525-8801 Fax: +81-(0)6-7525-8810
Website: <https://www.mgco.jp>
E-mail: info@mgco.jp

Your local representative: