

## IrDA COMMUNICATION ADAPTOR

(PC Configurator use)

### Functions & Features

- Communication adaptor used to configure M-System's products equipped with an IrDA port (e.g. model 71VR1, SC100) from a PC
- USB connection to the PC

## MODEL: COP-IRDA[1]

### ORDERING INFORMATION

- Code number: COP-IRDA[1]

Specify a code from below for [1].

(e.g. COP-IRDA/C144)

### [1] OPTIONS

#### Holder (must be specified)

/CL: Adaptor with L Type holder

/C96: Adaptor with holder for 96 mm height

/C144: Adaptor with holder for 144 mm height

/C: Adaptor only

/NL: L Type holder only

/N96: Holder (for 96 mm height) only

/N144: Holder (for 144 mm height) only

OPTIONS	AVAILABLE MODELS
/C96 /N96	71VR
/C144 /N144	SC100 SC200 SC110 SC210

### RELATED PRODUCTS

- Driver software

Software downloadable at M-System's web site.

### GENERAL SPECIFICATIONS

**Connection:** USB Type A connector

**Housing material:** Resin (black)

### COMMUNICATION

**Standard:** USB, IrDA

**IrDA communication distance:** Max. 20 cm

### CONNECTED DEVICE

**USB:** PC/AT compatible

OS (Windows 10 (32-bit, 64-bit), Windows 7 (32-bit, 64-bit), Windows Vista (32-bit), Windows XP)

**IrDA:** M-System's related IrDA products.

### INSTALLATION

**Supply voltage:** 4.75 – 5.25 V DC, approx. 100mA  
(supplied through USB port)

**Operating temperature:** -5 to +60°C (23 to 140°F)

**Operating humidity:** 30 to 90 %RH (non-condensing)

#### Weight:

/CL: 110g (3.9 oz)

/C96: 100g (3.5 oz)

/C144: 160g (5.6 oz)

/C: 60g (2.1 oz)


/NL: 50g (1.8 oz)

/N96: 40g (1.4 oz)

/N144: 100g (3.5 oz)




## DIMENSIONS unit: mm (inch)

### ■ COMMUNICATION ADAPTOR



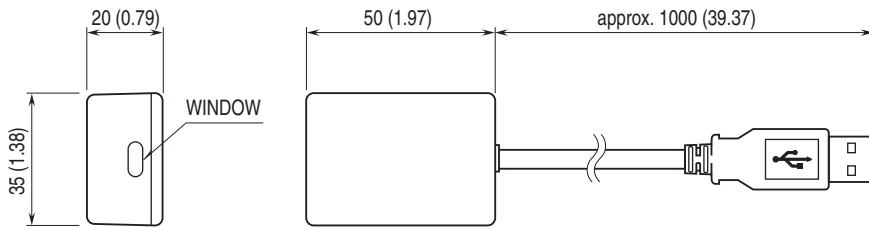


### ■ HOLDER


- L Type

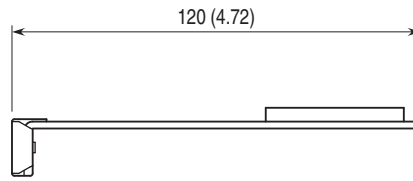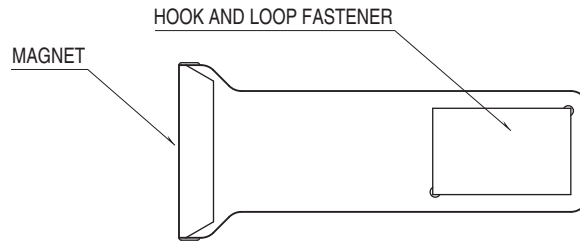

- For 96mm (3.78)

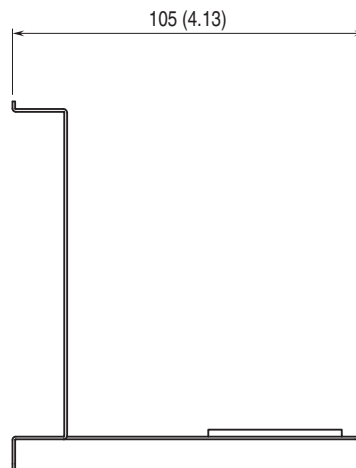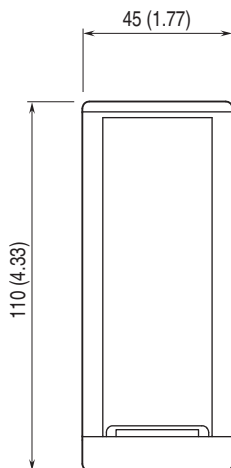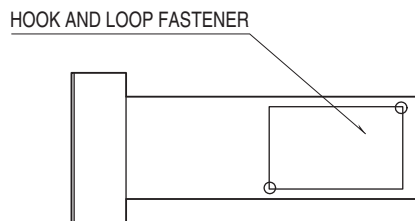

• For 144mm height

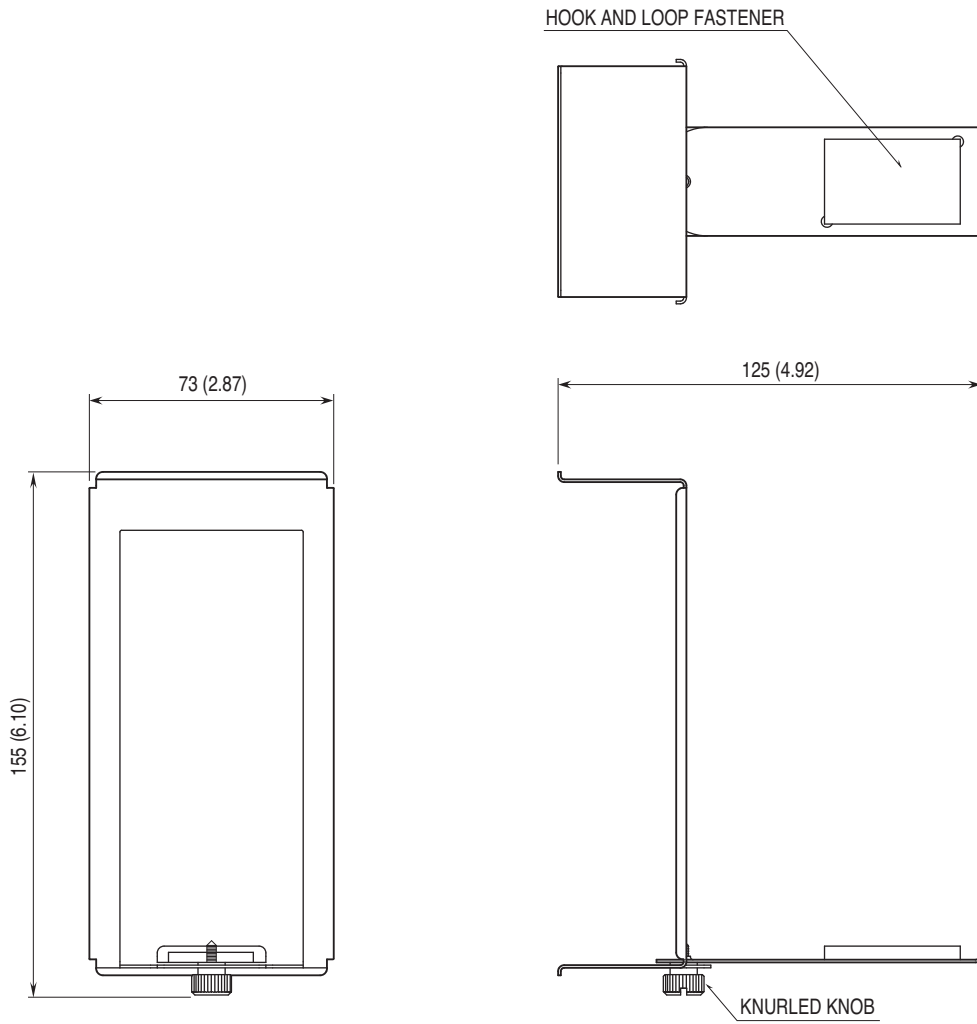

Specifications are subject to change without notice.